



Product Approval
USER: Public User

[Product Approval Menu](#) > [Product or Application Search](#) > [Application List](#) > **Application Detail**

OFFICE OF THE
SECRETARY

FL #	FL16546-R17														
Application Type	Revision														
Code Version	2023														
Application Status	Approved														
Comments															
Archived	☐														
Product Manufacturer	Clopay Building Products Company														
Address/Phone/Email	8585 Duke Blvd. Mason, OH 45040 (513) 770-6062 mwesterfield@clopay.com														
Authorized Signature	Scott Hamilton shamilton@clopay.com														
Technical Representative															
Address/Phone/Email															
Quality Assurance Representative															
Address/Phone/Email															
Category	Exterior Doors														
Subcategory	Sectional Exterior Door Assemblies														
Compliance Method	Evaluation Report from a Florida Registered Architect or a Licensed Florida Professional Engineer ☐ Evaluation Report - Hardcopy Received														
Florida Engineer or Architect Name who developed the Evaluation Report	Scott Hamilton														
Florida License	PE-63286														
Quality Assurance Entity	Intertek Testing Services NA, Inc. - QA Entity														
Quality Assurance Contract Expiration Date	12/31/2026														
Validated By	Gary Pfuehler ☒ Validation Checklist - Hardcopy Received														
Certificate of Independence	FL16546_R17_COI_Certification_of_Independence_of_Validation_Entity-Gary_Pfuehler_2016-02-19.pdf FL16546_R17_COI_Statement_on_Independence_of_Evaluation_Entity-ScottHamilton_2016-02-19.pdf														
Referenced Standard and Year (of Standard)	<table> <thead> <tr> <th>Standard</th><th>Year</th></tr> </thead> <tbody> <tr> <td>ANSI/DASMA 108</td><td>2005</td></tr> <tr> <td>ANSI/DASMA 115</td><td>2005</td></tr> <tr> <td>ASTM E1886</td><td>2005</td></tr> <tr> <td>ASTM E1996</td><td>2009</td></tr> <tr> <td>ASTM E330</td><td>2002</td></tr> <tr> <td>TAS 201</td><td>1994</td></tr> </tbody> </table>	Standard	Year	ANSI/DASMA 108	2005	ANSI/DASMA 115	2005	ASTM E1886	2005	ASTM E1996	2009	ASTM E330	2002	TAS 201	1994
Standard	Year														
ANSI/DASMA 108	2005														
ANSI/DASMA 115	2005														
ASTM E1886	2005														
ASTM E1996	2009														
ASTM E330	2002														
TAS 201	1994														

Equivalence of Product Standards
Certified By

Florida Licensed Professional Engineer or Architect
[FL16546 R17 Equiv 20200812 - FBC - ASTM 1886-1996 equiv.pdf](#)
[FL16546 R17 Equiv 20230712 - FBC - ASTM E330 equiv s.pdf](#)

Sections from the Code

Product Approval Method

Method 1 Option D

Date Submitted

02/29/2024

Date Validated

02/29/2024

Date Pending FBC Approval

03/04/2024

Date Approved

04/16/2024

Summary of Products

Go to Page



FL #	Model, Number or Name	Description
16546.1	01 W5-16-HY PAN-2F153/6: 73, 1500, 75, 75L, 76, 76V, 190, 84A, 94, 96, 96V, 42, 42B, 48, 48B, 55, 4F, 4RST, 6RST, 4RSF, 6RSF, GD5S, GD5SV, GR5S, GR5SV, AR5S, AR5SV, ED5S, ED5SV	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'0" wide) WINDCODE® W5 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +32 PSF/-32 PSF Other: Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 101922-A-Rev17 s.pdf Verified By: James D. Wheeler FL PE 91932 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.2	02 W5-16-HY PAN-2F153/6: 73, 1500, 75, 75L, 76, 76V, 190, 84A, 94, 96, 96V, 42, 42B, 48, 48B, 55, 4F, 4RST, 6RST, 4RSF, 6RSF, GD5S, GD5SV, GR5S, GR5SV, AR5S, AR5SV, ED5S, ED5SV	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'0" wide) WINDCODE® W5 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +32 PSF/-32 PSF Other: The standard glazing available for this product meets the wind load requirements of the building code but DOES NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 101922-B-Rev17 s.pdf Verified By: James D. Wheeler FL PE 91932 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.3	03 W8-16 PAN-2F443: GD4S, GR4S, ED4S, AR4S	Gallery/Artistry/Expressions: Steel Pan (min. 24 ga.) Double-Car (9'2" to 16'2" wide) WINDCODE® W8 Garage Door with Optional Impact-Resistant Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +46 PSF/-52 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104791-Rev07.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.4	04 W6-16 PAN-2F153: 73, 1500, 75, 75L, 76, 190, 84A, 94, 42, 42B, 48,	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'2" wide) WINDCODE® W6 Garage Door with Optional Impact-Resistant

	48B, 55, 4RST, 6RST, 4RSF, 6RSF, GD5S, GD5SV, GR5S, GR5SV, AR5S, AR5SV, ED5S, ED5SV	Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +36 PSF/-42 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no standard glazing) are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104710-A-Rev04.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.5	05 W6-16 PAN-2F153: 73, 1500, 75, 75L, 76, 190, 84A, 94, 42, 42B, 48, 48B, 55, 4RST, 6RST, 4RSF, 6RSF, GD5S, GD5SV, GR5S, GR5SV, AR5S, AR5SV, ED5S, ED5SV	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'2" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +36 PSF/-42 PSF Other: The standard glazing available for this product meets the wind load requirements of the building code but DOES NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104710-B-Rev04.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.6	06 W6-16 PAN-2F156: 76, 2RST	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'2" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +36 PSF/-42 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no standard glazing) are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104710-A-Rev04.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.7	07 W6-16 PAN-2F156: 76, 2RST	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'2" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +36 PSF/-42 PSF Other: The standard glazing available for this product meets the wind load requirements of the building code but DOES NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104710-B-Rev04.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.8	08 W5-16 PANSP-2F153/6: 73SP, 15SP, GD5SSP, GD5SSPV, 76SP, 76VSP	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'0" wide) WINDCODE® W5 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +32 PSF/-37 PSF Other: Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104818-A-Rev03.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.9	09 W5-16 PANSP-2F153/6: 73SP, 15SP, GD5SSP, GD5SSPV, 76SP, 76VSP	Steel Pan (min. 25 ga.) Double-Car (9'2" to 16'0" wide) WINDCODE® W5 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +32 PSF/-37 PSF Other: The standard glazing available for this product meets the wind load requirements of the building code but DOES NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104818-B-Rev03.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.10	10 W6-09 DSIE-1A171: 2050, 2051,	Double-skin Insulated EPS (exterior skin 27 ga. min.; interior

	2053, 4050, 4051, 4053, 62, 64, 65, 62G, 62LG, 64G, SDP38, SFL38, SRP38, 134, 135, 136, 6130, 6131, 6133	skin 29 ga. min.) Single-Car (up to 9'0" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +36 PSF/-44 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104814-A-Rev01.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.11	11 W6-09 DSIE-1A171: 2050, 2051, 2053, 4050, 4051, 4053, 62, 64, 65, 62G, 62LG, 64G, SDP38, SFL38, SRP38, 134, 135, 136, 6130, 6131, 6133	Double-skin Insulated EPS (exterior skin 27 ga. min.; interior skin 29 ga. min.) Single-Car (up to 9'0" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +36 PSF/-44 PSF Other: The standard glazing available for this product meets the wind load requirements of the building code but DOES NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104814-B-Rev01.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 131211-A.pdf Created by Independent Third Party: No
16546.12	12 W6-09 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Single-Car (up to 9'0" wide) WINDCODE® W6 Garage Door with Optional Impact-Resistant Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +38 PSF/-44 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104432-A-Rev06.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No
16546.13	13 W6-09 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Single-Car (up to 9'0" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +38 PSF/-44 PSF Other: Doors with standard glazing meet the wind load requirements of the building code but DO NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104432-B-Rev06.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No
16546.14	14 W6-16 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Double-Car (9'2" to 16'2" wide) WINDCODE® W6 Garage Door with Optional Impact-Resistant Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +38 PSF/-42 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104820-A-Rev04.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No

16546.15	15 W6-16 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Double-Car (9'2" to 16'2" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +38 PSF/-42 PSF Other: Doors with standard glazing meet the wind load requirements of the building code but DO NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104820-B-Rev04.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No
16546.16	16 W6-18 DSIE-1F471: GD2SP, GR2SP, GD2LP, GR2LP, AR2SP, AR2LP, ED2SP, ED2LP, 4302, HDGC, 6202, MFC68, 4305, HDGR, 6205, SFR68, MFR68	Double-skin Insulated EPS (exterior skin 27 ga. min.; interior skin 27 ga. min.) Double-Car (16'4" to 18'2" wide) WINDCODE® W6 Garage Door with Optional Impact-Resistant Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +38 PSF/-42 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104810-A-Rev05.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No
16546.17	17 W6-18 DSIE-1F471: GD2SP, GR2SP, GD2LP, GR2LP, AR2SP, AR2LP, ED2SP, ED2LP, 4302, HDGC, 6202, MFC68, 4305, HDGR, 6205, SFR68, MFR68	Double-skin Insulated EPS (exterior skin 27 ga. min.; interior skin 27 ga. min.) Double-Car (16'4" to 18'2" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +38 PSF/-42 PSF Other: Doors with standard glazing meet the wind load requirements of the building code but DO NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104810-B-Rev05.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No
16546.18	18 W6-18 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Double-Car (16'4" to 18'2" wide) WINDCODE® W6 Garage Door with Optional Impact-Resistant Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +38 PSF/-42 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546 R17 II 104821-A-Rev05.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No
16546.19	19 W6-18 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Double-Car (16'4" to 18'2" wide) WINDCODE® W6 Garage Door
Limits of Use Approved for use in HVHZ: No Approved for use outside HVHZ: Yes Impact Resistant: No Design Pressure: +38 PSF/-42 PSF Other: Doors with standard glazing meet the wind load requirements of the building code but DO NOT meet the impact resistant requirement for windborne debris regions.		Installation Instructions FL16546 R17 II 104821-B-Rev05.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546 R17 AE CBPC 141219-B.pdf Created by Independent Third Party: No

16546.20	20 W8-09 DSIU-1F471: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, 7205, 8205, MFR68U, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU	Double-skin Insulated Intellicore (exterior skin 27 ga. min.; interior skin 27 ga. min.) Single-Car (up to 9'0" wide) WINDCODE® W8 Garage Door with Optional Impact-Resistant Lites
Limits of Use Approved for use in HVHZ: Yes Approved for use outside HVHZ: Yes Impact Resistant: Yes Design Pressure: +54 PSF/-60 PSF Other: Max. Wind Speed (V _{ult}): 170 MPH. Solid doors (no glazing) or doors with optional impact-resistant glazing are impact-resistant (large missile impact).		Installation Instructions FL16546_R17_II_104435-Rev06.pdf Verified By: Scott Hamilton FL PE 63286 Created by Independent Third Party: No Evaluation Reports FL16546_R17_AE_CBPC_141219-B.pdf Created by Independent Third Party: No

Go to Page 

  Page 1 / 5  

[Back](#) [Next](#)

[Contact Us](#) :: 2601 Blair Stone Road, Tallahassee FL 32399 Phone: 850-487-1824

The State of Florida is an AA/EEO employer. [Copyright 2007-2013 State of Florida.](#) :: [Privacy Statement](#) :: [Accessibility Statement](#) :: [Refund Statement](#)

Under Florida law, email addresses are public records. If you do not want your e-mail address released in response to a public-records request, do not send electronic mail to this entity. Instead, contact the office by phone or by traditional mail. If you have any questions, please contact 850.487.1395. *Pursuant to Section 455.275(1), Florida Statutes, effective October 1, 2012, licensees licensed under Chapter 455, F.S. must provide the Department with an email address if they have one. The emails provided may be used for official communication with the licensee. However email addresses are public record. If you do not wish to supply a personal address, please provide the Department with an email address which can be made available to the public. To determine if you are a licensee under Chapter 455, F.S., please click [here](#).

Product Approval Accepts:




MODELS	SHORT	LONG	MODELS	FLUSH	GRIDDED	SHEET	REV. NO.	ZONE	DATE	ECN NO.	APPLYD:	REVISIONS
CLOPAY GALLERY	GD2SP, GR2SP	GD2LP, GR2LP	CLOPAY CLASSIC	4302, HDGC	4305, HDGR	1 OF 4	01	-	6/24/13	-	SH	REVISED FOR RELEASE.
HOLMES ARTISTRY	AR2SP	AR2LP	HOLMES CLASSIC	6202	6205		02	-	7/2/13	-	SH	REMOVED IMPACT RESISTANT GLAZING.
IDEAL EXPRESSIONS	ED2SP	ED2LP	IDEAL CLASSIC	MFC68	SFR68, MFR68		03	-	12/6/13	-	SH	ADDED IMPACT RESISTANT GLAZING.
							04	-	12/19/14	-	SH	ADDED GROOVED MODELS.
							05	-	8/6/20	-	SH	UPDATED TITLE BLOCK AND REMOVED WIND CHART



OPTIONAL GLAZING MAY BE STANDARD (OSB OR BETTER) OR IMPACT RESISTANT GLAZING. MAXIMUM GLAZING SIZE (DLO) IS 38'-1/2"x13". GLAZING MAY BE SHORT-PANEL (NOT SHOWN) OR LONG-PANEL (SHOWN). SEE SECTION B-B ON SHEET 2 FOR DETAILS. GLAZING MAY BE INSTALLED IN TOP SECTION (SHOWN) OR INTERMEDIATE SECTION (NOT SHOWN).

(1) 20 GA. BACKER PLATE AT EACH INTERMEDIATE HINGE LOCATION. BACKER PLATES ATTACHED WITH DOUBLE-SIDED ACRYLIC ADHESIVE TO BACK OF DOOR.

(2) GALV. STEEL TOP ROLLER BRACKETS. SEE SECTION A-A ON SHEET THREE FOR DETAILS.

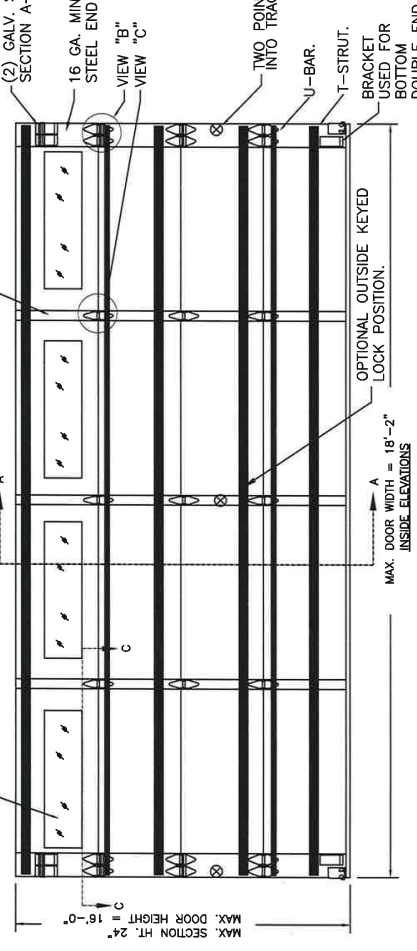

DOOR HEIGHT	# OF SECTIONS
UP TO 8'0"	4
8'3" TO 10'0"	5
10'3" TO 12'0"	6
12'3" TO 14'0"	7
14'3" TO 16'0"	8
MAX SECTION HEIGHT: 24'	

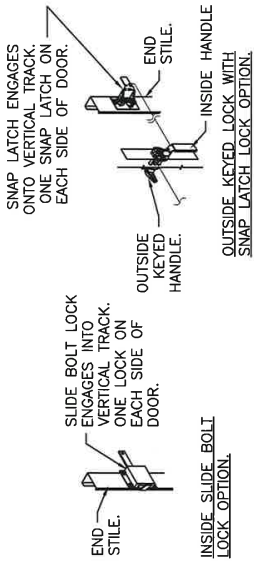

DESIGN ENGINEER:
SCOTT HAMILTON, P.E.
FLORIDA LICENSE NO. 63286

DESIGN LOADS: +38.0 P.S.F. & -42.0 P.S.F.
TEST LOADS: +57.0 P.S.F. & -63.0 P.S.F.

Unless Stated Otherwise TOLERANCES are:
 0 = ±.031
 .00 = ±.015
 .000 = ±.005
 .0000 = ±.001
 Degrees = ±1/2°
 Unless Stated Otherwise DIMENSIONS ARE IN INCHES.

8585 Duke Boulevard
Mason, OH 45040 USA
Tel. No. 513-770-4850
Fax No. 513-770-4853

Clopay CORPORATION
 DESCRIPTION: 2" GALLERY EPS DOORS 18'2"W (SEE TABLE)
 DRAWN BY: SH
 CHECKED BY: SH
 DATE: 1/10/13
 SCALE: NTS
 DWG. NO.: 104810-A/B

MANUFACTURING PRODUCT CODE
DSIE-1F 471

PART NO.: N/A

WINDLOAD RATING
W6 DP38T

VER: IBC

4

3

2

1

MODELS	SHORT	LONG	MODELS	FLUSH	GRIDDED
CLOPAY GALLERY	GD2SP, GR2SP	GD2LP, GR2LP	CLOPAY CLASSIC	4302, HDGC	4305, HDGR
HOLMES ARTISTRY	AR2SP	AR2LP	HOLMES CLASSIC	6202	6205
IDEAL EXPRESSIONS	ED2SP	ED2LP	IDEAL CLASSIC	MFC68	SFR68, MFR68

SHEET:
2 OF 4


REV. NO.	ZONE	DATE	ECN NO.	APPVD:	SH	DESCRIPTION
05	-	-	-	-	-	SEE REVISION HISTORY ON SHEET ONE.

REVISIONS

IMPACT-RESISTANT CONSTRUCTION:

SOLID DOORS (NO GLAZING) OR DOORS WITH OPTIONAL IMPACT-RESISTANT GLAZING ARE IMPACT-RESISTANT. OPTIONAL IMPACT RESISTANT ASSEMBLY CONSISTS OF ALUMINUM FRONT FRAME AND SABIC IP LEXAN 9034 (VERSIONS ALSO APPROVED: MR10, 9030, 90318, 90316, 90317, 90314, 90355) OR BAYER MAKROLON GP (VERSIONS ALSO APPROVED: SL, AR, 15), APPROVED C01 PLASTICS IN ACCORDANCE WITH IBC/FBC 2606 AND APPROVED C1 PLASTICS IN ACCORDANCE WITH FBC 2612. THE ENTIRE DOOR ASSEMBLY INSTALLED IN COMPLIANCE WITH THIS SECTION MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE AND INTERNATIONAL BUILDING CODE AND IS LARGE- AND SMALL-MISSILE IMPACT RESISTANT.

SECTION B-B (IMPACT-RESISTANT GLAZING OPTION)

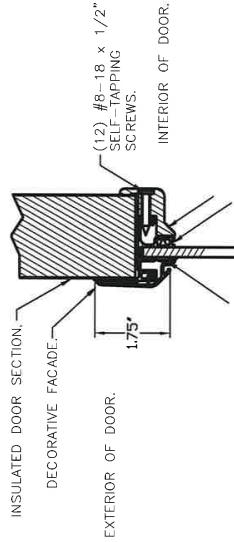


IMPACT-RESISTANT ASSEMBLY DETAILS
DRAWING 104810-A


STANDARD ASSEMBLY CONSTRUCTION:

OPTIONAL DSB OR 1/8" ACRYLIC LITES AVAILABLE. OPTIONAL ACRYLIC GLAZING IS PLASKOLITE OPTIX OR LUCITE CP APPROVED C02 PLASTIC IN ACCORDANCE WITH IBC/FBC 2606. THE ENTIRE DOOR ASSEMBLY INSTALLED IN COMPLIANCE WITH THIS SECTION MEETS THE WIND LOAD REQUIREMENTS OF THE FLORIDA BUILDING CODE OR INTERNATIONAL BUILDING CODE BUT DOES NOT MEET THE IMPACT RESISTANT REQUIREMENT FOR WINDBORNE DEBRIS REGIONS (REF. CHAPTER 16 FBC/IBC).

SECTION B-B (NON-IMPACT RESISTANT GLAZING OPTION)

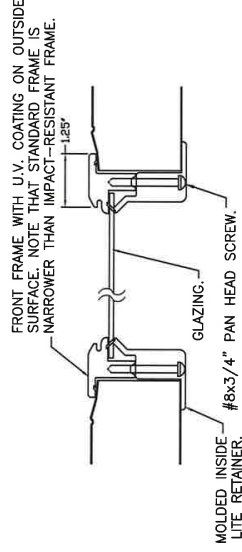

STANDARD ASSEMBLY DETAILS
DRAWING 104810-B



DESIGN ENGINEER:
SCOTT HAMILTON, P.E.
FLORIDA LICENSE No. 63286

DESIGN LOADS: +38.0 P.S.F. & -42.0 P.S.F.
TEST LOADS: +57.0 P.S.F. & -63.0 P.S.F.

Unless Stated Otherwise TOLERANCES are:
.0 = ±.031
.00 = ±.015
.000 = ±.005
.0000 = ±.001
Degrees = ±1/2°
Unless Stated Otherwise DIMENSIONS ARE IN INCHES.

Clopay
CORPORATION
8585 Duke Boulevard
Mason, OH 45040
Tel. No. 513-770-4833
Fax No. 513-770-4853

DESCRIPTION: 2" GALLERY EPS DOORS 18'2"W (SEE TABLE)

DRAWN BY: SH

CHECKED BY: SH

DATE: 1/10/13

SCALE: NTS

DWG: B

SHEET 2 OF 4

SIZE: B

VER: IBC

DWG. NO.: 104810-A/B

W6 DP38T

WINDLOAD RATING

PART NO.: N/A

DSIE-1F471

MANUFACTURING PRODUCT CODE

2 FLORIDA PRODUCT APPROVAL 16546

3


4

MODELS	SHORT	LONG
CLOPAY GALLERY	GD2SP, GR2SP	GD2LP, GR2LP
HOLMES ARTISTRY	AR2SP	AR2LP
IDEAL EXPRESSIONS	ED2SP	ED2LP

MODELS	FLUSH	GROOVED
CLOPAY CLASSIC	4302, HDGC	4305, HDGR
HOLMES CLASSIC	6202	6205
IDEAL CLASSIC	MFC68	SFR68, MFR68

SHEET: 3 OF 4

REV. NO.	ZONE	DATE	ECN NO.	APPVD:	REVISIONS
05	-	-	-	SH	SEE REVISION HISTORY ON SHEET ONE.

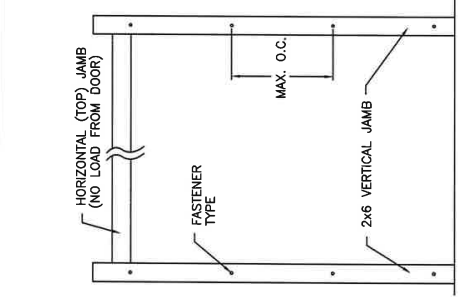

JAMB TO SUPPORTING STRUCTURE ATTACHMENT

- NOTES:
- ALL THE LOAD FROM THE DOOR IS TRANSFERRED TO THE TRACK AND THEN FROM THE TRACK TO THE 2x6 VERTICAL STP (GRADE #2 OR BETTER) JAMBS. NO LOAD FROM THE DOOR IS TRANSFERRED TO THE HORIZONTAL (TOP) JAMB.
 - EACH VERTICAL JAMB SEES A MAXIMUM DESIGN LOAD OF +304 LB & -336 LB. PER LINEAR FOOT OF JAMB.
 - ALL JAMB FASTENERS MAY BE (BUT ARE NOT REQUIRED TO BE) COUNTERSUNK TO PROVIDE A FLUSH MOUNTING SURFACE.
 - A 1/3 STRESS INCREASE FOR WIND LOAD WAS NOT USED IN THE CALCULATION OF ALLOWABLE LOADS FOR ANCHORS AND FASTENERS FOR STEEL, CONCRETE AND MASONRY.

PREPARATION OF JAMBS BY OTHERS


NOTE: THE DESIGN OF THE SUPPORTING STRUCTURAL ELEMENTS SHALL BE THE RESPONSIBILITY OF THE PROFESSIONAL OF RECORD FOR THE BUILDING OR STRUCTURE AND IN ACCORDANCE WITH CURRENT BUILDING CODES FOR THE LOADS LISTED ON THIS DRAWING.

2x6 JAMB TO SUPPORTING STRUCTURE ATTACHMENT


(NOT TO BE USED FOR ATTACHMENT OF TRACK ANGLE TO 2x6 VERTICAL JAMBS OR SUPPORTING STRUCTURE)

BUILDING TYPE	FASTENER TYPE	MAXIMUM ON-CENTER DISTANCE BETWEEN FASTENERS*	STEEL WASHERS REQUIRED?
BLOCK WALL	1/4" x 1-1/2" MIN. EMBED TAPCON CONCRETE ANCHOR	5"	1" O.D.
3000 PSI MIN. CONCRETE	1/4" x 1-1/2" MIN. EMBED TAPCON CONCRETE ANCHOR	13"	1" O.D.
2000 PSI MIN. CONCRETE	3/8" x 1-1/2" MIN. EMBED SIMPSON STRONG-TIE SLEEVE ANCHOR	11"	INCLUDED
WOOD FRAME (SYP 0.55 SG) 1/2" x 3" LAG SCREW (ASTM A307, GRADE A) 1-1/2" EMBED INTO STRUCTURE		19"	1" O.D.


* FIRST (BOTTOM) ANCHOR STARTING AT NO MORE THAN HALF OF THE MAXIMUM ON-CENTER DISTANCE. HIGHEST ANCHOR INSTALLED AT LEAST AS HIGH AS THE DOOR OPENING.
CLOPAY DOES NOT SUPPLY JAMB ATTACHMENT FASTENERS.
MINIMUM DISTANCE BETWEEN CENTER OF ANCHOR AND EDGE OF CONCRETE BLOCK: 2-1/2", EXCLUDING STUCCO THICKNESS.



DESIGN ENGINEER:
SCOTT HAMILTON, P.E.
FLORIDA LICENSE No. 63286

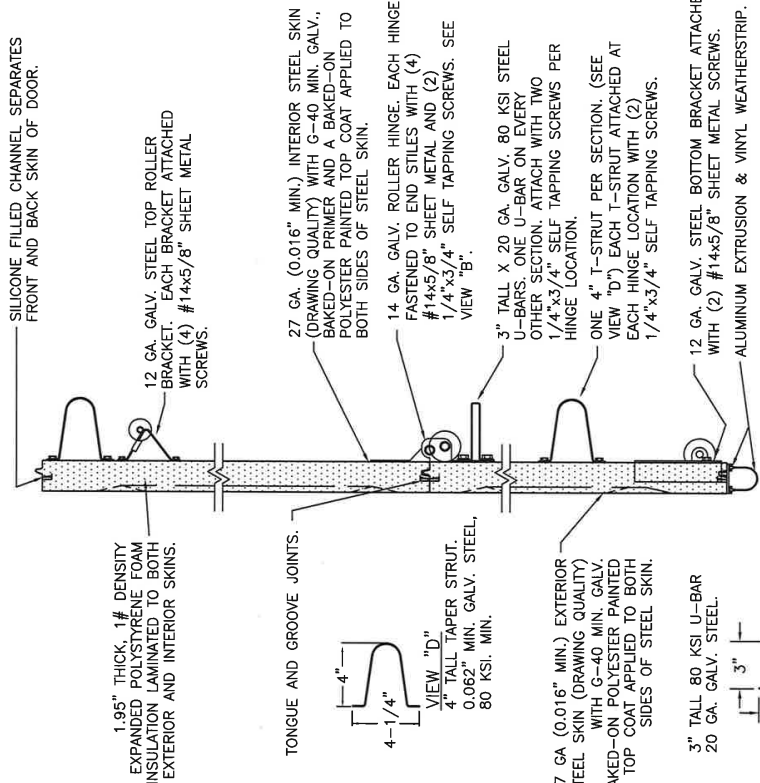

SECTION A-A (SIDE VIEW)



MANUFACTURING PRODUCT CODE	DSIE-IF 471
PART NO.:	N/A
WINDLOAD RATING	W6 DP38T
DESCRIPTION:	2" GALLERY EPS DOORS 18'2\"/>
DRAWN BY:	SH
CHECKED BY:	SH
DATE:	1/10/13
SCALE:	NTS
DWG. NO.:	DWG. B
VER:	IBC

DESIGN LOADS: +38.0 P.S.F. & -42.0 P.S.F.
TEST LOADS: +57.0 P.S.F. & -63.0 P.S.F.

Unless Stated Otherwise TOLERANCES are:
0 = ±.031
.00 = ±.015
.000 = ±.005
.0000 = ±.001
Degrees = ±1/2°
Unless Stated Otherwise DIMENSIONS ARE IN INCHES.

4

3

2

1

MODELS	SHORT	LONG
CLIPAY GALLERY	GD2SP, GR2SP	GD2LP, GR2LP
HOLMES ARTISTRY	AR2SP	AR2LP
IDEAL EXPRESSIONS	ED2SP	ED2LP

MODELS	FLUSH	GROOVED
CLIPAY CLASSIC	4302, HDGC	4305, HDGR
HOLMES CLASSIC	6202	6205
IDEAL CLASSIC	MFC68	SFR68, MFR68


REV. NO.	ZONE	DATE	ECN NO.	APPVD:	DESCRIPTION
05	-	-	-	SH	SEE REVISION HISTORY ON SHEET ONE.

REVISIONS


SHEET:
4 OF 4

2" TRACK CONFIGURATION.

NOTE: TRACK CONFIGURATION ABOVE THE DOOR JAMB DOES NOT AFFECT THE WIND LOAD RATING OF THIS DOOR.

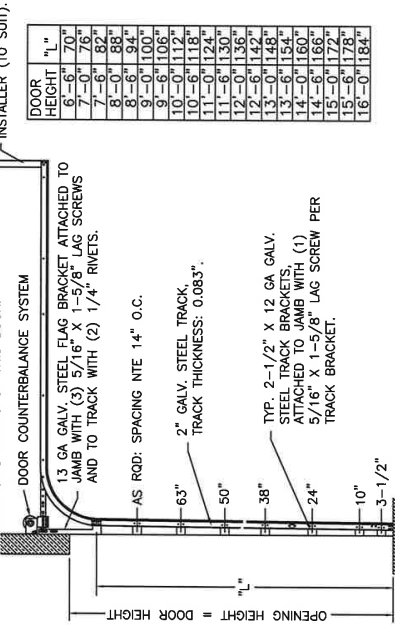

JAMB CONFIGURATION FOR 2" TRACK.

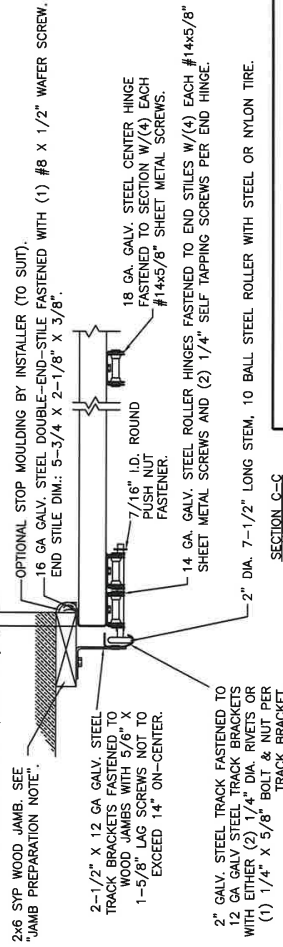


SECTION C-C


PREPARATION OF JAMBS BY OTHERS.

3" TRACK CONFIGURATION.

NOTE: TRACK CONFIGURATION ABOVE THE DOOR OPENING DOES NOT AFFECT THE WIND LOAD RATING OF THIS DOOR.

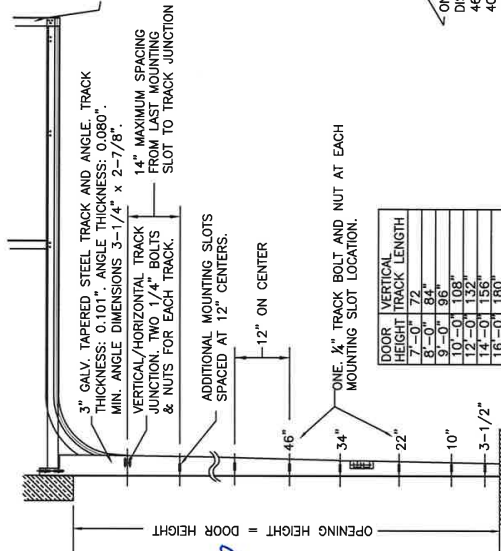

JAMB CONFIGURATION FOR 3" TRACK.

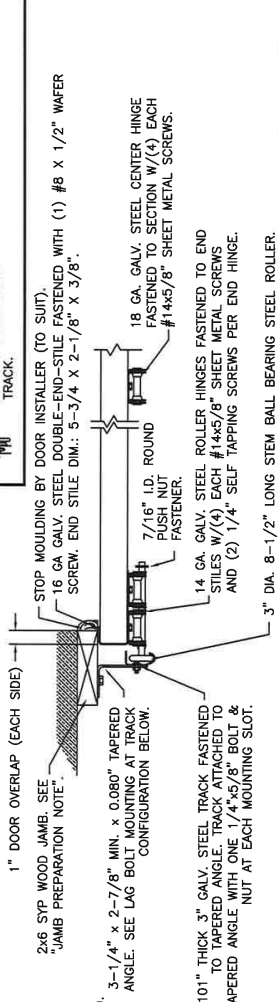

SECTION C-C

PREPARATION OF JAMBS BY OTHERS.

DESIGN LOADS: +38.0 P.S.F. & -42.0 P.S.F.
TEST LOADS: +57.0 P.S.F. & -63.0 P.S.F.

Unless Stated Otherwise

TOLERANCES ARE

0 = ± 0.01

.00 = ± 0.05

.000 = ± 0.01

Degrees = ± 1/2°

Unless Stated Otherwise

Dimensions are in inches.

MANUFACTURING PRODUCT CODE
DSIE-1F 471

PART NO.: N/A

WINDLOAD RATING
W6 DP38T

DESCRIPTION: 2" GALLERY EPS DOORS 18'2" W (SEE TABLE)

DRAWN BY: SH

CHECKED BY: SH

DATE: 1/10/13


SCALE: NTS

SHEET 4 OF 4

SIZE: B

VER: IBC

DESIGN ENGINEER:
SCOTT HAMILTON, P.E.
FLORIDA LICENSE No. 63286

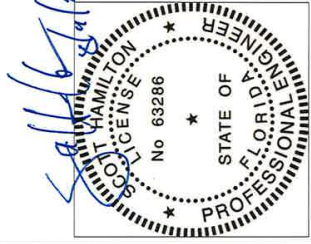

2 FLORIDA PRODUCT APPROVAL 16546

December 19, 2014 (Revised 8/18/23)

Evaluation Report for Clopay Corporation Sectional Garage Doors

I have evaluated the wind load door designs as shown on the drawings listed below. I have reviewed the test reports, which were generated by accredited laboratories as required by the relevant Florida Administrative Rule, the engineering rational analysis, and the product drawings. The test reports are listed below. Assembly testing was conducted by American Test Lab North Carolina.

For the doors listed in Tables 1 through 3, Static Pressure Tests were conducted in accordance with TAS 202-1994, ASTM-E330-2002 and ANSI/DASMA 108-2005/2012. Missile Impact and Cyclic Pressure Tests were conducted in accordance with TAS 201-1994 and TAS 203-1994 and ASTM E1886-2005 and ASTM E1996-2009 and ANSI/DASMA 115-2005/2012. The pressures listed on the drawings are either direct results of these tests or results obtained through engineering rational analysis based on actual tests. I have concluded that the sectional garage door designs listed below in Tables 1 through 3 are in compliance with these High Velocity Hurricane Zone test requirements of the Florida Building Code and therefore are qualified as impact-resistant assemblies (large missile impact).

TABLE 1: Drawings for doors with Manufacturing Product Code (MPC) DSIE-1F471:

103954-A-Rev06,	max. door size 9'0" x 16'0";	+38/-44 PSF (design load)
104785-A-Rev04,	max. door size 16'2" x 16'0";	+38/-42 PSF (design load)
104810-A-Rev05,	max. door size 18'2" x 16'0";	+38/-42 PSF (design load)
104119-Rev05,	max. door size 9'0" x 16'0";	+54/-60 PSF (design load)
104786-Rev06,	max. door size 16'2" x 16'0";	+46/-52 PSF (design load)

TABLE 2: Drawings for doors with Manufacturing Product Code (MPC) DSIU-1F471:

104432-A-Rev06,	max. door size 9'0" x 16'0";	+38/-44 PSF (design load)
104820-A-Rev04,	max. door size 16'2" x 16'0";	+38/-42 PSF (design load)
104821-A-Rev05,	max. door size 18'2" x 16'0";	+38/-42 PSF (design load)
104435-Rev06,	max. door size 9'0" x 16'0";	+54/-60 PSF (design load)
104822-Rev05,	max. door size 16'2" x 16'0";	+46/-52 PSF (design load)
104428-A-Rev03,	max. door size 9'0" x 16'0";	+28/-29 PSF (design load)
104429-A-Rev03,	max. door size 16'0" x 16'0";	+25.5/-25.5 PSF (design load)
104430-Rev01,	max. door size 18'0" x 16'0";	+25/-25 PSF (design load)

TABLE 3: Drawings for doors with Manufacturing Product Code (MPC) DSIUO-1K/M479:

104948-A-Rev03,	max. door size 9'0" x 16'0";	+38/-44 PSF (design load)
104932-A-Rev06,	max. door size 16'2" x 16'0";	+38/-42 PSF (design load)
104951-A-Rev04,	max. door size 18'2" x 16'0";	+38/-42 PSF (design load)
104949-Rev03,	max. door size 9'0" x 16'0";	+54/-60 PSF (design load)
104928-Rev03,	max. door size 16'2" x 16'0";	+46/-52 PSF (design load)
105421-A-Rev01,	max. door size 10'0" x 16'0";	+38/-44 PSF (design load)
105391-Rev01,	max. door size 10'0" x 16'0";	+54/-60 PSF (design load)

For the doors in Tables 4 through 7, Static Pressure Tests were conducted in accordance with ASTM-E330-2002 and ANSI/DASMA 108-2005. The pressures listed on the drawings are either direct results of these tests or results obtained through

engineering rational analysis based on actual tests. I have concluded that the sectional garage door designs listed below in Tables 4 through 7 are in compliance with the test requirements of the Florida Building Code.

TABLE 4: Drawings for doors with Manufacturing Product Code (MPC) DSIE-1F471:

103954-B-Rev06, max. door size 9'0" x 16'0"; +38/-44 PSF (design load)
 104785-B-Rev04, max. door size 16'2" x 16'0"; +38/-42 PSF (design load)
 104810-B-Rev05, max. door size 18'2" x 16'0"; +38/-42 PSF (design load)

TABLE 5: Drawings for doors with Manufacturing Product Code (MPC) DSIU-1F471:

104432-B-Rev06, max. door size 9'0" x 16'0"; +38/-44 PSF (design load)
 104820-B-Rev04, max. door size 16'2" x 16'0"; +38/-42 PSF (design load)
 104821-B-Rev05, max. door size 18'2" x 16'0"; +38/-42 PSF (design load)
 104428-B-Rev03, max. door size 9'0" x 16'0"; +28/-29 PSF (design load)
 104427-Rev01, max. door size 16'0" x 16'0"; +30/-30 PSF (design load)
 104429-B-Rev03, max. door size 16'0" x 16'0"; +25.5/-25.5 PSF (design load)
 104431-Rev01, max. door size 16'0" x 16'0"; +30/-30 PSF (design load)

TABLE 6: Drawings for doors with Manufacturing Product Code (MPC) DSIUO-1M/K479:

104948-B-Rev03, max. door size 9'0" x 16'0"; +38/-44 PSF (design load)
 104932-B-Rev06, max. door size 16'2" x 16'0"; +38/-42 PSF (design load)
 104951-B-Rev01, max. door size 18'2" x 16'0"; +38/-42 PSF (design load)
 105421-B-Rev01, max. door size 10'0" x 16'0"; +38/-44 PSF (design load)

TABLE 7: Drawings for doors with Manufacturing Product Code (MPC) DSIU-1A471:

104424-Rev02, max. door size 9'0" x 16'0"; +20/-21 PSF (design load)
 104425-Rev02, max. door size 16'0" x 16'0"; +20/-21 PSF (design load)
 104427-Rev02, max. door size 16'0" x 16'0"; +30/-30 PSF (design load)

Test Reports:

The following test reports are based on testing conducted by American Test Lab at their North Carolina Facility: 0304.01-13 (5/1/13), 0115.01-13R (3/18/13), 0422.01-13 (5/30/13), 0326.01-13 (5/1/13), 0117-01-13R (3/18/13), 1202.02-13 (12/5/13), 0717.01-14 (8/4/14), 0515.01-14 (6/11/14), 0812.01-14 (9/3/14), 0723.01-14 (8/4/14), 0430.01-14 (7/10/14), 0905.01-18 (10/11/18). These reports document compliance with the TAS testing standards and are signed and sealed by David Johnson, FL PE 61915.

The following test reports are based on testing conducted by Clopay Corporation at their Mason testing facility (accredited by ANAB/L-A-B for ASTM E330 and ANSI/DASMA 108 testing): ATC 18-020 (3/30/18), ATC 18-024 (4/27/18), ATC 14-030 (11/19/14), ATC 16-010 (8/1/16), ATC 16-017 (11/2/16), ATC 18-026 (5/15/18), ATC 18-002 (2/1/18).

Product Description for doors with MPC DSIE-1F471:

These doors consist of 2" double-skin insulated sections with an EPS core laminated to both skins. Both inner and outer skins are min. 27 ga. (0.016") G40 per ASTM A653. The maximum section height is 24". These doors may have optional Impact-Resistant Glazing (Aluminum). Optional Impact-Resistant Glazing is an aluminum front frame and a separate polycarbonate glazing. Optional vents shall be in accordance with Clopay D/N 101845. The following models are at least structurally equivalent to the tested door: GD2SP, GR2SP, GD2LP, GR2LP, AR2SP, AR2LP, ED2SP,

ED2LP, 4302, HDGC, MFC68, 6202, MFC68, 4305, HDGR, MFR68, 6205, SFR68. Not all models may be shown on a given drawing.

Product Description for doors with MPC DSIU-1F471:

These doors consist of 2" double-skin insulated sections with polyurethane insulation foamed in place between both skins. Both inner and outer skins are min. 27 ga. (0.016") G40 DDS per ASTM A653. The maximum section height is 24". These doors may have optional Impact-Resistant Glazing (Aluminum). Optional Impact-Resistant Glazing is an aluminum front frame and a separate polycarbonate glazing. Optional vents shall be in accordance with Clopay D/N 101845. The following models are at least structurally equivalent to the tested door: GD2SU, GR2SU, GD2LU, GR2LU, AR2SU, AR2LU, ED2SU, ED2LU, 9202, HDPC20, 7202, 8202, MFC68U, 9205, HDPR20, MFR68U, 7205, 8205, BD2EU, BR2EU, BD2NU, BR2NU, PR2EU, PR2NU. Not all models may be shown on a given drawing.

Product Description for doors with MPC DSIU-1K/M479:

These doors consist of 2" double-skin insulated sections with polyurethane insulation foamed in place between both skins. Both inner and outer skins are min. 27 ga. (0.016") G40 DDS per ASTM A653. The maximum section height is 24". These doors may have optional Impact-Resistant Glazing (Aluminum). Optional Impact-Resistant Glazing is an aluminum front frame and a separate polycarbonate glazing. The following "Coachman" models are at least structurally equivalent to the tested door: Coachman CGUnn CXUnn, Settlers SXUnn, Affinity AGUnn. Note that 'nn' represents the arrangement of the decorative overlays. The following "Canyon Ridge" models are at least structurally equivalent to the tested door: Canyon Ridge CAN2nn-XX, Glenmoor GLN2nn-XX, Custom Wood-Look MWL2nn-XX. Note that 'nn' represents the arrangement of the decorative overlays. Note that 'XX' represents the arrangement of the type of cladding. The following "Canyon Ridge Modern Series" models are at least structurally equivalent to the tested door: Canyon Ridge Modern Series CRM2zAI, Glenmoor Modern GLMzAI, Custom Wood-Look Modern WLMzAI. Note that 'z' represents the type of the decorative overlays. Not all models may be shown on a given drawing.

Product Description for doors with MPC DSIU-1FA71:

These doors consist of 1-3/8" double-skin insulated sections with polyurethane insulation foamed in place between both skins. Both inner and outer skins are min. 27 ga. (0.016") G40 DDS per ASTM A653. The maximum section height is 24". These doors may have optional Impact-Resistant Glazing (Aluminum). Optional Impact-Resistant Glazing is an aluminum front frame and a separate polycarbonate glazing. Optional vents shall be in accordance with Clopay D/N 101845. The following models are at least structurally equivalent to the tested door: GD1SU, GR1SU, GD1LU, GR1LU, AR1SU, AR1LU, ED1SU, ED1LU. Not all models may be shown on a given drawing.

Impact Resistant Glazing (Aluminum):

The optional impact resistant glazing is an aluminum front frame and a separate polycarbonate glazing that is an approved C1 plastic in accordance with testing required by FBC-B 2606. Approved polycarbonate materials are Sabic IP Lexan 9034 (versions also approved: MR10, 9030, 90318, 90316, 90317, 90311, 90314, 90355) and Bayer Makrolon GP (versions also approved: SL, AR, 15). Approval based on review of NOA 13-0717.01 (Sabic) and NOA 12-0605.05 (Bayer) and manufacturer's product datasheets.

Non-Impact Resistant Glazing:

The optional non-impact resistant glazing is a screw-together plastic frame and a separate glass glazing in compliance with the ASTM E1300 requirements of FBC-B Section 2404.


Limitations:

The drawing(s) cited above are an explicit part of this evaluation report. The text of this report does not attempt to address all design details and relies on the illustrations and text of these drawings as well.

Jambs, lintels, sills or other structural elements required to prepare openings are not covered. The design of the supporting structural elements shall be the responsibility of the professional of record for the building or structure and in accordance with current building codes for the loads listed on the drawing(s) referenced above.

Installation requirements per the relevant Florida Administrative Rule, including attachments, are detailed on the drawing(s) listed above. Installation must be in accordance with manufacturer's installation instructions and must be as shown on the drawing(s) listed above. The manufacturer's licensed design professional listed on the drawing(s) has reviewed the attachment details and installation requirements.

Signature:

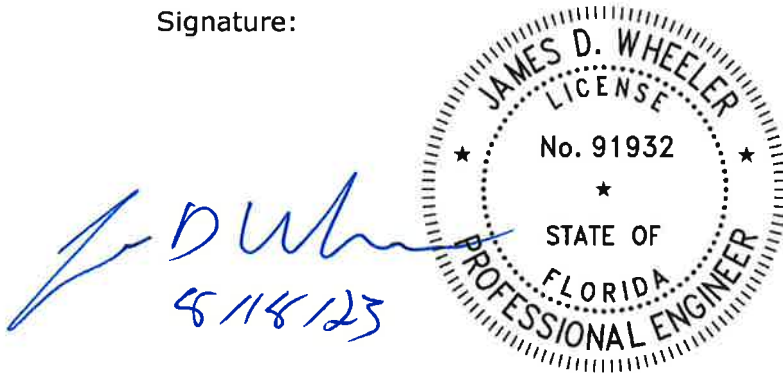

James D. Wheeler, P.E.
Florida P.E. #91932
Senior Project Engineer
Clipay Corporation