



320 Sycamore St.
Wauseon, OH 43567

H001329514-1

Design Pressure (PSF) Rating

Impact Resistant

+53.00

-60.00

Model: CHT-712

Installation Drawing

WL-0600-0122-08-53-60LM-D

Test Standards

TAS: 202, 201/203

DASMA/ANSI:

N/A

Miami-Dade County Product:
Control Approved


24-0719.04



Wind Load

Thank you for choosing this Haas Door Wind Load Rated Door.

This is your Wind Load Certification label. Detach the left portion of this label and affix it to the garage door after installation. It should be applied to the inner surface of a panel or per requirements of the local jurisdiction. Make sure the surface is clean and dry before applying the label. Try to choose a location where the label will be protected from damage and excessive sunlight.

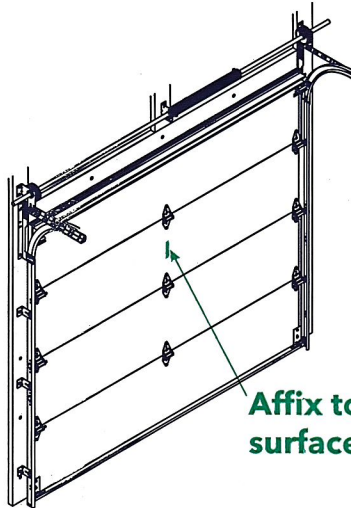

Affix to the inner
surface of a panel.

High Wind Event Recommendations:

- Close the door and leave it closed.
- Mechanically lock the door via manual locking device.
- Disconnect the operator, when door is manually locked.
- Unlock door prior to normal operation.

Per DASMA Technical Data Sheet #192.

www.dasma.com/PDF/Publications/TechData-Sheets/CommercialResidential/TSD192.pdf

WARNING! After installation, failure to remove the protective film from the polycarbonate windows could result in adhesion to the glass.

All assembly drawings and other technical information can be instantly viewed by scanning this QR code using your iOS camera or other similar scanning device. This information can also be viewed by visiting i.haasdoor.com and entering any of the component serial numbers from the door into the Door Finder.