



Hurricane Rated

Amarr® Residential Garage Doors





SELECT YOUR WIND LOAD DOOR

Steel Carriage House		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
7	AMARR CARRIAGE COURT	90—130 mph	I	
8	AMARR CLASSICA®	90—185 mph	I	M
9	AMARR HILLCREST	90—169 mph	I	
10	AMARR DESIGNER'S CHOICE	90—155 mph	I	
Steel Traditional		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
11	AMARR HERITAGE®	90—185 mph	I	M
12	AMARR LINCOLN	90—169 mph	I	
13	AMARR OLYMPUS	90—155 mph	I	M
Wood		Wind Speed Approvals*	Impact Resistant	Miami-Dade Approvals
15	AMARR BY DESIGN	110—175 mph	I	M
Aluminum		Wind Speed Approvals*		
16	AMARR HORIZON	134—168 mph†		
17	AMARR VISTA	90—151 mph		

*Based on ASCE7-05

†Based on ASCE7-10

AMARR ADVANTAGE

STYLISH STRENGTH



With Amarr garage doors, you don't have to compromise style for hurricane preparedness. Almost all Amarr residential garage doors are available with a wind load reinforcement system that meets or exceeds building code requirements in your area. Whether your home is traditional or contemporary, our Amarr garage door designs can add beauty, curb appeal and long lasting value to your home.

HURRICANE RATED DOORS

When installed according to our instructions and local building codes, Amarr hurricane rated garage doors:



- Withstand rapid cyclic pressure and static load forces up to 245 mph.¹
- Resist large missile impact at 50' per second (35 mph).²
- May qualify for discounts on your homeowner's insurance.³

Meet or exceed these building codes:

- Florida Building Code (FBC)
- International Code Council (ICC)
- Texas Department of Insurance (TDI)
- High-Velocity Hurricane Zone (HVHZ)

M (Miami – Dade and Broward Counties)

WIND LOAD APPROVED DOORS

Use a variety of reinforcement materials, including Struts and R-Trusses which are engineered to meet specific building code requirements. Amarr garage doors are tested in accordance with DASMA TDS-108. Impact glass is available in short and long panel windows on select Amarr garage doors; impact glass may shatter, but remains intact despite the force.



SAFETY



Garage doors are the largest and heaviest moving object in the home. Amarr garage doors have a patented safety bottom bracket to reduce the risk of serious injuries.

ENERGY EFFICIENCY

Maintain the temperature in your garage with a garage door with a high R-value rating. We offer a wide range of materials, insulations and door thicknesses to provide the level of energy efficiency you desire.

SUSTAINABILITY

Amarr products are made with up to 90% recycled content and approximately 5-10% of the steel is reused at the steel mill.

MADE IN USA

All Amarr residential and commercial steel and aluminum garage doors are manufactured in the USA,



affirming our commitment to high quality and durability.



AMARR CONSTRUCTION

STEEL

SINGLE-LAYER: Steel

Amarr Classica, Heritage, Hillcrest & Lincoln

- Heavy-duty exterior steel
- Durable, reliable, low maintenance



DOUBLE-LAYER: Steel + Insulation

Amarr Classica, Heritage, Hillcrest & Lincoln





- Heavy-duty exterior steel
- Durable, reliable, low maintenance
- Environmentally safe polystyrene thermal insulation with vinyl backing
- Energy efficient
- Quiet operation



TRIPLE-LAYER: Steel + Insulation + Steel

Amarr Classica, Designer's Choice, Heritage, Hillcrest, Lincoln & Olympus

- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- Environmentally safe polystyrene or polyurethane thermal insulation
- Superior energy efficiency
- Extra quiet operation



* True White Bead Board only.

** All panels and colors except True White Bead Board.

† True White Short and Flush panels only.

‡ All panels and colors except True White Short and Flush panels.

WOOD

Wood + Insulation + Wood

Amarr by Design

- Custom, handcrafted carriage house designs
- Multiple wood options
- Paint or stain grade wood
- Environmentally safe polystyrene thermal insulation
- Energy efficient




ALUMINUM

Aluminum + Glass


Amarr Vista

- 2" thick extruded commercial-grade aluminum frame for durability
- Corrosion resistant aluminum
- ClearView Strut System strengthens door without restricting view



Amarr Horizon

- Extruded aluminum frame provides durability, low maintenance and corrosion resistance
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability
- 7' tall doors are three sections high
- Equal glass heights in all sections of a door
- Glass expands up to 8'2" wide

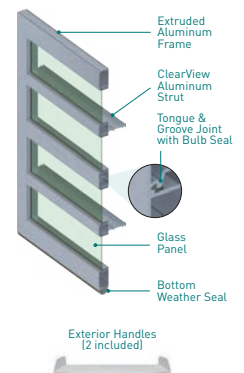


STEEL

FOUR-LAYER: Overlay + Steel + Insulation + Steel

Amarr Carriage Court


- Heavy-duty exterior and interior steel
- Durable, reliable, low maintenance
- Environmentally safe polystyrene thermal insulation
- Energy efficient
- Extra quiet operation





WINDPRO™ CLASSIFICATION SYSTEM

Amarr WindPro classification system helps you to easily find the Amarr Wind Load door for your location. Amarr WindPro WP classification indicates the miles per hour (mph) wind speed range and impact resistance. The higher the "WP" classification, the higher the approved mph wind speed range. The "WPI" classification indicates an impact-approved door.

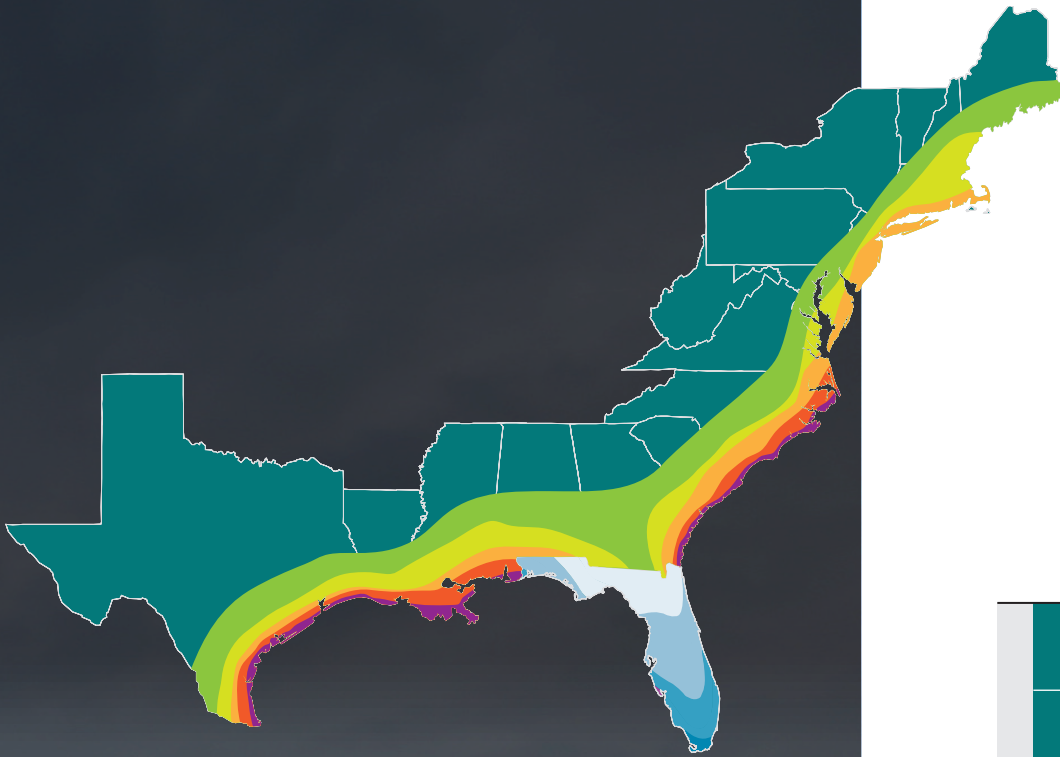

UNDERSTAND YOUR AREA WIND LOAD REQUIREMENTS

Local government regulations for wind load requirements can vary from one location to another due to door size, the door's location on the structure, and localized wind zones, among other factors. The homeowner is responsible to make sure their garage door meets local building codes.

United States East Coast & Gulf Wind Zones

Based on ASCE7-05	WindPro Rating	Based on ASCE7-10	WindPro Rating
90 – 100 mph	WP1 & WP2	115 – 130 mph	WP2 & WP3
100 – 110 mph	WP2 & WP3	130 – 150 mph	WP5
110 – 120 mph	WP3 & WP4	150 – 170 mph	WP4 & WP5/WP5i
120 – 130 mph	WP4 & WP5/WP5i	170 + mph	WP6i-WP10i
130 – 150 mph	WP5-WP8 WP5i-WP10i		

		ASCE 7-05	ASCE 7-10/ ASCE7-16
		WIND SPEED (MPH)	
NON-IMPACT	WP1	90-99	110-124
	WP2	100-109	125-139
	WP3	110-119	140-149
	WP4	120-129	150-164
	WP5	130-139	165-175
	WP6	140-149	176-189
	WP7	150-159	190-204
	WP8	160-169	205-219
IMPACT	WP5i	130-139	165-175
	WP6i	140-149	176-189
	WP7i	150-159	190-204
	WP8i	160-169	250-219
	WP9i	170-179	220-229
	WP10i	180+	230+

Exposure B with a mean roof height < 30'




Tanglewood design with Closed Arch in Wicker Tan/White with Versailles decorative hardware

AMARR CARRIAGE COURT


Distinctly defined. The Amarr Carriage Court collection adds increased curb appeal to your home. Built with durable composite overlay trim and insulated steel-backed sections, these garage doors provide energy efficiency, noise reduction and innovative design to your home.

DESIGNS

AVAILABLE WITH WINDOWS

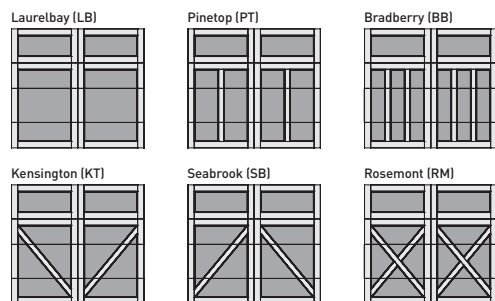

NOT AVAILABLE WITH WINDOWS

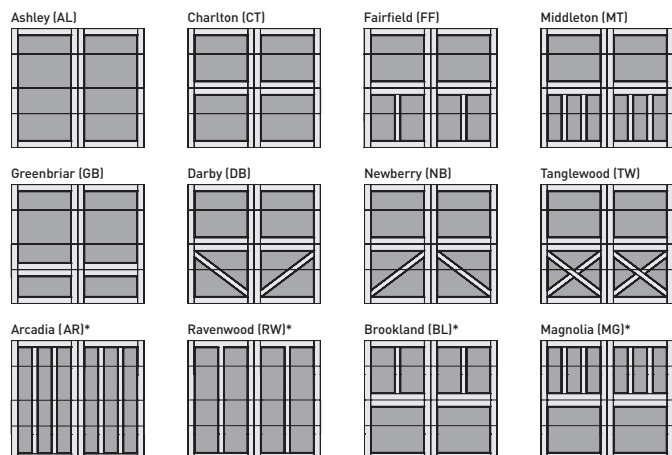

*Closed Square only.

CC4000
**Four-Layer:
Overlay + Steel + Insulation + Steel**
**CC4000
R-VALUE
6.48**


Decorative Windows & Hardware

Optional decorative windows & hardware add character to your door. See page 15 for all window and decorative hardware options.


Rosemont with Closed Square (RM104)




Laurelbay with Clear Square (LB115)



Bradberry with 3 Lite Arch (BB110)



Charlton with Closed Arch (CT105)




Darby with Closed Square (DB104)



COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.

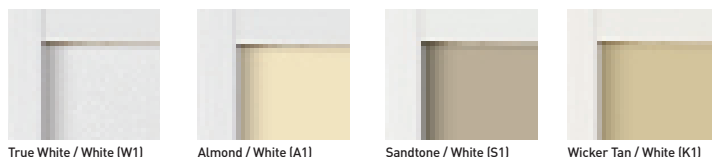

Door, window frames, and overlay can be painted using 100% acrylic exterior latex paint with a Light Reflective Value (LRV) of 8 or higher. Contact paint manufacturer for LRV ratings.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Carriage Court CC4000 	9'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.7/-14.9) – (26.4/-31.1)	Yes ³	Yes ³	No
	16'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.1/-13.8) – (25.3/-28.7)	Yes ³	Yes ³	No
	18'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.0/-13.6) – (25.1/-28.4)	Yes ³	Yes ³	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models




Northampton design in Walnut with Versailles decorative handles and hinges

AMARR CLASSICA

Looks can be deceiving. From a distance, you see wood. Up close, it's sturdy, durable, low-maintenance steel. Attractive and structurally strong carriage house styles that go up and down like traditional garage doors. Three-section tall designs, instead of four, help deliver a more authentic carriage house look. Deception never looked so good.

DESIGNS

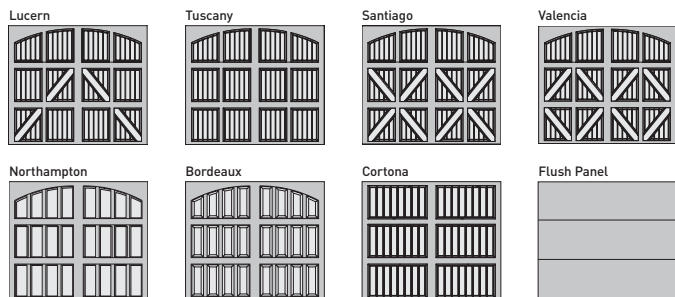

CL1000
Single-Layer:
Steel

CL2000
Double-Layer:
Steel + Insulation

CL3000
Triple-Layer:
Steel + Insulation + Steel

CL3000
R-VALUE
13.35

Decorative Windows & Hardware

Optional decorative windows & hardware add character to your door. See page 15 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



*Odd heights not available in CL1000/CL2000; not available in Flush.
†Not available in Flush.

TWO-TONE PAINT OPTIONS†

		BASE DOOR							
PANEL		True White	Almond	Wicker Tan	Sandstone	Terratone	Charcoal Gray	Dark Brown	Black
True White									
Almond									
Wicker Tan									
Sandstone									
Terratone									
Charcoal Gray									
Dark Brown									
Black									
Hunter Green									
Gray									

Lucern with Closed Square (L2)



Tuscany with Closed Arch (T1)




Bordeaux with Closed Arch (B1)



Cortona with Seine Windows (C8)



Santiago with Closed Arch (S1)



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'
Doors are available up to 14' tall or a max weight of 635 lbs.

	Door Width	WindPro Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Classica CL3000	9'	WP1-WP5/ WP5i-WP10i	90 – 180 mph 116 – 232 mph (12.8/-15.1) – (50.8/-59.8)	Yes	Yes	Yes ³
	16'	WP1-WP7/ WP5i-WP7i	90 – 151 mph 116 – 194 mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes ³
	18'	WP1-WP7/ WP5i-WP10i	90 – 151 mph 116 – 194 mph (12.2/-13.8) – (33.7/-38.1)	Yes	Yes	Yes ³
Miami-Dade			N/A	N/A	N/A	N/A
Amarr Classica CL1000 and CL2000	9'	WP1-WP8/ WP5i-WP10i	90 – 185 mph 116 – 235 mph (12.7/-14.9) – (54.4/-62.0)	Yes ³	Yes ³	No
	16'	WP1-WP8/ WP5i-WP9i	90 – 175 mph 116 – 225 mph (12.3/-13.9) – (45.9/-52.1)	Yes ³	Yes ³	No
	18'	WP1-WP8/ WP5i-WP10i	90 – 160 mph 116 – 205 mph (12.2/-13.8) – (38/-43.0)	Yes ³	Yes ³	No
M Miami-Dade	9'	WP5i-WP10i	185 mph 235 mph (54.4/-62.0)	Yes	No	No
	16'	WP5i	169 mph 218 mph (43.4/-49.3)	Yes	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



Recessed design with Thames DecraTrim windows in Sandtone with Alpine handles


AMARR HILLCREST

Value is a beautiful thing. With the Amarr Hillcrest collection you get more than a custom carriage house look. You get exceptional style and durability with conventional hardware at a competitive price.

Bead Board design with Wagon Wheel DecraTrim in True White with Blue Ridge decorative handles and hinges



Long Bead Board with Stockton DecraTrim (LPBB20)



Bead Board with Cascade DecraTrim (BB23)



Long Bead Board with Waterford DecraTrim (LPBB25)



Recessed with Thames DecraTrim (RE30)



Recessed (RE)



DESIGNS

Bead Board



Long Bead Board



Recessed



HI1000
Single-Layer:
Steel

HI2000
Double-Layer:
Steel + Insulation

HI3138
1-3/8" Triple-Layer:
Steel + Insulation
+ Steel

HI3000
2" Triple-Layer:
Steel + Insulation
+ Steel

HI3000
R-VALUE
9.05

Decorative Windows & Hardware

Choose DecraTrim window inserts to coordinate with your home's design along with optional decorative hardware. See page 15 for all window and decorative hardware options.

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



See page 18 for more information.



CURRENTLY UNAVAILABLE

†Available in H13138/H13000 only.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Hillcrest HI3000 Lifetime Limited Warranty	9'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	LP ³	LP ³
	16'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes ³	LP ³	LP ³
	18'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes ³	LP ³	LP ³
Amarr Hillcrest HI3138 Lifetime Limited Warranty	9'	WP1-WP7/ WP5i	90 – 155 mph 120 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	LP ³	LP ³
	16'	WP1-WP5/ WP5i	90 – 130 mph 117 – 155 mph (12.3/-13.9) – (25.6/-29.1)(12.2/-13.8) –	Yes ³	LP ³	LP ³
	18'	WP1-WP5/ WP5i	90 – 130 mph 116 – 168 mph (25.4/-28.7)(12.8/-15.1) – (45.2/-53.4)	Yes ³	LP ³	LP ³
Amarr Hillcrest HI1000 and HI2000 15-Year Limited Warranty 25-Year Limited Warranty	9'	WP1-WP8/ WP5i-WP8i	90 – 169 mph 116 – 218 mph (12.3/-13.9) – (25.6/-29.1)	Yes ³	LP ³	No
	16'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.2/-13.8) – (31.6/-35.7)	No	LP ³	No
	18'	WP1-WP5	90 – 130 mph 116 – 187 mph	No	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



Bead Board design in True White with Blue Ridge handles

AMARR DESIGNER'S CHOICE

Energy efficiency makes the Amarr Designer's Choice a popular choice for garage doors. With a high R-value of 19.40[‡], this door gives you the ultimate in energy efficiency and quiet operation.

Bead Board design in True White with Blue Ridge handles and hinges



Bead Board with Cascade DecraTrim (BB23)



Raised Closed (RS)

Long Bead Board with Stockton DecraTrim (LPBB20)



Bead Board with Thames DecraTrim (BB30)



Recessed with Moonlite DecraTrim (RE24)




DESIGNS

Bead Board



Long Bead Board



Recessed



DC3138[†]

Triple-Layer:
Steel + Insulation + Steel

DC3138
R-VALUE
14.46

DC3200

Triple-Layer:
Steel + Insulation + Steel

DC3200
R-VALUE
19.40[‡]

Decorative Hardware

Choose decorative hardware to best coordinate with your home. See page 15 for hardware options.

[†] DC3138 only available in Bead Board design.

[‡] For True White Bead Board only, 13.35 R-value for all other panels and colors.

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



See page 18 for more information.

CURRENTLY UNAVAILABLE

Wicker Tan (WK)
Mahogany (MY)

DC3138 only available in True White and Color Zone.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro WP1-WP7/ WP5i-WP7i	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Designer's Choice DC3200 Lifetime Limited Warranty	9'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.8/-15.1) – (38.0/-44.9)	Yes ³	Yes	Yes
	16'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-41.0)	Yes ³	Yes	Yes
	18'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 116 – 200 mph (12.3/-13.9) – (37.0/-40.6)	Yes ³	Yes	Yes
Amarr Designer's Choice DC3138 Lifetime Limited Warranty	9'	WP1	90 mph 116 mph (12.8/-15.1)	No	No	No
	16'	WP1	90 mph 116 mph (12.3/-13.9)	No	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



Long Panel design with Thames DecraTrim windows in Walnut

AMARR HERITAGE


Tradition never goes out of style. Choose from four different panel designs to create the steel garage door you always wanted. The Amarr Heritage collection features low-maintenance, heavy gauge steel doors in your choice of traditional styles. Great looks for years to come.

Long Bead Board design with Moonlite DecraTrim in True White with Blue Ridge handles and hinges




DESIGNS

CARRIAGE HOUSE



TRADITIONAL



HR1000
Single-Layer:
Steel

HR2000
Double-Layer:
Steel + Insulation

HR3000
Triple-Layer:
Steel + Insulation + Steel

HR3000
R-VALUE
9.05

Decorative Windows

Choose from DecraTrim window inserts to coordinate with your home. See page 15 for all window options.

*Available in Amarr Heritage HR3000 only

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



CURRENTLY UNAVAILABLE

Mahogany (MY)

Woodgrain finishes are dual directional for all panel designs.

MOSAIC WINDOWS



With Mosaic Window Options you decide the number and location of the windows. Only available for HR3000 traditional designs with Standard or Impact glass.

Recessed with
Thames DecraTrim (RE30)



Short Panel with
Waterford DecraTrim (SP25)



Flush Panel (FP)*
with Short Panel Obscure windows



Bead Board with
Wagon Wheel DecraTrim (BB26)



Long Panel
with Moonlite DecraTrim (LP24)



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width	WindPro Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Heritage HR3000	9'	WP1-WP8/WPSi-WP10i	90 – 190 mph 120 – 245 mph (14.3/-16.9) – (57.0/-67.5)	Yes ³	SP, LP ³	SP ³ , LP ³
	16'	WP1-WP8/WPSi-WP9i	90 – 175 mph 117 – 224 mph (14.1/-14.1) – (48.0/-52.0)	Yes ³	SP, LP ³	SP ³ , LP ³
	18'	WP1-WP8/WPSi-WP8i	90 – 165 mph 116 – 212 mph (12.2/-13.8) – (42.0/-46.0)	Yes ³	SP ³ , LP ³	SP ³ , LP ³
Miami-Dade	9'	WP10i	190 mph 245 mph (57.0/-67.5)	Yes	No	SP, LP
	16'	WP9i	175 mph 225 mph (48.0/-52.0)	Yes	No	SP ³ , LP ³
	18'	WP8i	165 mph 212 mph (42.0/-46.0)	Yes	No	SP, LP
Amarr Heritage HR1000 and HR2000	9'	WP1-WP8/WPSi-WP8i	90 – 169 mph 214 – 214 mph (14.3/-16.0) – (45.3/-51.2)	Yes ³	SP ³ , LP ³	SP ³
	16'	WP1-WP8/WPSi-WP10i	90 – 185 mph 116 – 239 mph (12.3/-13.9) – (51.9/-58.9)	Yes ³	SP ³ , LP ³	SP ³
	18'	WP1-WP7/WPSi-WP7i	90 – 155 mph 116 – 200 mph (12.2/-13.8) – (37.0/-40.6)	Yes ³	SP ³ , LP ³	SP ³
Miami-Dade	9'	WP8i-WP10i	169 – 189 mph 214 – 244 mph (45.3/-51.2) – (57.0/-67.0)	Yes	No	SP ³
	16'	WP7i-WP10i	156 – 185 mph 202 – 239 mph (38.0/-42.0) – (47.5/-52.0)	Yes	No	SP ³
	18'	WP8i-WP10i	165 – 180 mph 212 – 232 mph (42.0/-46.0) – (48.6/-55.0)	Yes	No	SP ³

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



Long Panel design in True White

AMARR LINCOLN

Exceptional value: Energy efficient, 2" thick traditional style garage doors with conventional hardware at competitive prices.

Short Panel design with Cascade DecraTrim windows in Wicker Tan



Flush Panel (FP)*



Ribbed Panel (RP)*



Long Panel with Stockton DecraTrim (LP20)



Short Panel (SP)




Short Panel with Stockton DecraTrim (SP20)



DESIGNS


Short Panel



LI1000

Single-Layer:
Steel


Long Panel



LI2000

Double-Layer:
Steel + Insulation

Flush Panel*



LI3138

1-3/8" Triple-Layer:
Steel + Insulation
+ Steel

Ribbed Panel*



LI3000

2" Triple-Layer:
Steel + Insulation
+ Steel



Decorative Options

Choose DecraTrim window inserts to coordinate with your home's design. See page 15 for all window options.

* LI1000/LI2000 Flush Panel has stucco texture; LI3000 has woodgrain texture.
† Available in LI3138/LI3000 only.

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



See page 18 for more information.



* Available in LI1000/LI2000
Flush Panel design with stucco texture.
† Available in LI3138/LI3000 only.

Woodgrain finishes are dual directional for all panel designs.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30'. Doors are available up to 14' tall or a max weight of 635 lbs.

	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Lincoln LI3000 	9'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	SP ² , LP ³	SP ² , LP ³
	16'	WP1-WP5/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (12.3/-13.9) – (36.4/-41.4)	Yes ³	SP ² , LP ³	SP ² , LP ³
	18'	WP1-WP7/ WP5i-WP7i	90 – 155 mph 123 – 200 mph (12.2/-13.8) – (36.1/-40.8)	Yes ³	SP ² , LP ³	SP ² , LP ³
Amarr Lincoln LI3138 	9'	WP1-WP7/ WP5i	95 – 155 mph 123 – 200 mph (14.3/-16.9) – (38.0/-45.0)	Yes ³	SP ² , LP ³	SP ² , LP ³
	16'	WP1-WP5/ WP5i	90 – 130 mph 117 – 155 mph (12.3/-13.9) – (25.6/-29.1)	Yes ³	SP ² , LP ³	SP ² , LP ³
	18'	WP1-WP5/ WP5i	90 – 130 mph 116 – 168 mph (12.2/-13.8) – (25.4/-28.7)	Yes ³	SP ² , LP ³	SP ² , LP ³
Amarr Lincoln LI1000 and LI2000 	9'	WP1-WP8/ WP5i-WP8i	90 – 169 mph 116 – 218 mph (12.8/-15.1) – (45.2/-53.4)	Yes ³	SP ² , LP ³	LP ³
	16'	WP1-WP5	90 – 130 mph 116 – 168 mph (12.3/-13.9) – (25.6/-29.1)	No	SP, LP ³	No
	18'	WP1-WP5	90 – 130 mph 116 – 187 mph (12.2/-13.8) – (31.6/-35.7)	No	SP	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models



Short Panel design in True White

AMARR OLYMPUS

Energy efficiency makes Amarr Olympus doors popular models.

With a high R-value of 19.40[†], these doors give you the ultimate in energy efficiency and quiet operation.

Long Panel design in True White



Short Panel with Sunray DecraTrim (SP27)




Long Panel with Moonlite DecraTrim (LP24)



Short Panel with Cathedral DecraTrim (SP22)



Short Panel with Stockton DecraTrim (SP20)




Long Panel with Prairie DecraTrim (LP21)




DESIGNS

Short Panel*



Long Panel



Flush Panel*



Flush Panel available in True White only.

OL3138[†]
Triple-Layer:
Steel + Insulation + Steel

OL3138
R-VALUE
14.46

OL3200
Triple-Layer:
Steel + Insulation + Steel

OL3200
R-VALUE
19.40[†]

Decorative Hardware

Choose decorative hardware to best coordinate with your home. See page 15 for hardware options.

* OL3138 only available in Flush and Short Panel designs.
† OL3138 only available in 8', 9' or 16' wide doors.
‡ For True White Short and Flush panels only.
13.35 R-value for all other panels and colors.

WIND LOAD APPROVALS

Exposure B with mean roof height < 30'. Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr Olympus OL3200 	9'	WP1-WP7/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.8/-15.1) - (38.0/-44.9)	Yes ³	Yes	Yes
	16'	WP1-WP7/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.3/-13.9) - (37.0/-41.0)	Yes ³	Yes	Yes
	18'	WP1-WP7/ WP5i-WP7i	90 - 155 mph 116 - 200 mph (12.3/-13.9) - (37.0/-40.6)	Yes ³	Yes	Yes
Amarr Olympus OL3138 	9'	WP1	90 mph 116 mph (12.8/-15.1)	No	No	No
	16'	WP1	90 mph 116 mph (12.3/-13.9)	No	No	No

Tested in accordance with DASMA TDS-108 ¹ Based on ASCE7-05 ² Based on ASCE7-10 ³ Option available on select models

COLORS

Actual paint colors may vary from samples shown. Price upcharge applies to all colors except True White.



OL3138 only available in True White and Color Zone.

STEEL OPTIONS

GLAZING OPTIONS

Clear [C]



Obscure [O]*



*Price upcharge applies.

Frost [WF]†



Dark Tint [WD]†



†Available in Standard and Impact glass; price upcharge applies.

AMARR CLASSICA TOP SECTIONS

Closed Arch • Available for Tuscany (T1), Santiago (S1), Lucern (L1), Valencia (V1), Cortona (C1)



Closed Square • Cortona (C2)



Closed Arch • Northampton (N1)



Closed Square • Northampton (N2)



Closed Arch • Bordeaux (B1)



Closed Square • Bordeaux (B2)



Closed Square • Available for Tuscany (T2), Santiago (S2), Lucern (L2), Valencia (V2)



Closed Double Arch
Available for Tuscany (T1D), Santiago (S1D),
Lucern (L1D), Valencia (V1D), Cortona (C1D)



No Insert



Madeira [5]*



Rhine [7]*



Thames [10]*



Danube [4]*



Nile [6]*



Seine [8]*



*Window inserts shown on Clear glass.
Design also available with
Obscure, Frost or Dark Tint glass.

DECRA TRIM WINDOW INSERTS

Available with Clear, Obscure, Frost or Dark Tint glass.

SHORT PANEL

Short Panel
DecraTrim
inserts
available for
Heritage,
Stratford,
and Lincoln
collections.

No Insert



Cathedral [22]



Wagon Wheel [26]



Stockton [20]



Cascade [23]



Sunray [27]



Prairie [21]



Waterford [25]



Full Sunray [28] Available for 16', 17' and 18' widths only.



Five Piece Sunray [29] 10' in True White only.



LONG PANEL

Long Panel
DecraTrim
inserts
available for
Heritage,
Stratford,
Lincoln,
Oak Summit,
and Hillcrest
collections.

No Insert



Cathedral [22]



Waterford [25]



Thames [30]



Stockton [20]



Cascade [23]



Wagon Wheel [26]



Arched Thames [31]



Full Sunray [28] Available for 15'6", 15'8", 16', 17' and 18' widths only.



DECORATIVE HARDWARE

ALUMINUM

Available for Amarr Carriage Court, Classica, Designer's Choice, Heritage†, and Hillcrest collections.

9" Handles



18" Strap Hinges
With Clavos*



11" L-Hinge
With Clavos*



10-1/2" Handles†



17" Strap Hinges
With Clavos*



3-1/2" Ring Handles



VERSAILLES

CANTERBURY

*Hinges with Clavos not recommended for arched openings. †Not for use with high lift installations.

STAMPED STEEL

Available for Amarr Carriage Court, Classica, Designer's Choice, Heritage†, and Hillcrest collections.

11" Handles



16" Strap Hinges



BLUE RIDGE



AMARR LOCK
Available for Heritage, Lincoln
and Olympus collections.



ALPINE

MAGNETIC ABS VINYL

Available for Amarr Classica, Designer's Choice, Heritage†, and Hillcrest collections.

12" Handles




16" Strap Hinges



CASTLE ROCK

11" Handles



18" Strap Hinges



MAPLE CREEK

4" Ring Handles (with removable backer plate)



10" tall



NOTTINGHAM

18" STRAP HINGES



1-3/4" CLAVOS



CLAVOS

†Carriage House designs only

AMARR CARRIAGE COURT TOP SECTIONS

FOR DESIGNS AVAILABLE WITH WINDOWS

Available for
Laurelbay,
Pinetop,
Bradberry,
Kensington,
Seabrook and
Rosemont.

Available with
Clear or Obscure
glass only.

Closed Square [104]



Closed Arch [105]



Clear Square [115]



Clear Arch [114]



3 Lite Square [106]



3 Lite Arch [110]



4 Lite Square [107]



4 Lite Arch [111]



6 Lite Square [112]



6 Lite Arch [108]



8 Lite Square [113]



8 Lite Arch [109]



FOR DESIGNS NOT AVAILABLE WITH WINDOWS

Available for
Ashley, Charlton, Fairfield, Middleton, Greenbriar, Darby, Newberry and Tanglewood:

Closed Square [104]



Closed Arch [105]





AMARR BY DESIGN AD4000


Meticulously handcrafted for reliable performance.

These all-natural wood doors add striking beauty and value to your home. Unlimited custom designs available.


DESIGNS

Unlimited design options.


Sutcliffe




Roberts



Curtis




Easton




Lowry




Preston




Runion



Terry



4000 (Closed Arch)




3000 (Custom)




Custom designs available.
Simply draw your own unique door, give it to your Amarr dealer, and we'll take it from there.



7010 (I)



7020 (L)



AD4000

Triple-Layer:
Wood + Insulation + Wood

AD4000
R-VALUE
9.00

WOOD CHOICES

Other types of wood available upon request. Doors shipped natural.

Clear Vertical Grain Cedar



Incense Cedar



Red Grandis



Mahogany



Runion



Preston



Roberts



Sutcliffe



Curtis



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH ¹ /MPH ² (PSF Design Pressures)	Impact Resistant	Windows	
					Standard	Impact
Amarr by Design AD4000	10'	WP6-WP8/ WP6i-WP9i	142 – 176 mph 194 – 229 mph (37.0/-37.0) – (50.0/-57.0)	Yes ³	Yes	Yes ³
	16'	WP7/WP7i	158 mph 205 mph (40.0/-43.0)	Yes ³	Yes	No
	18'	WP3-WP7/ WP5i-WP7i	111 – 159 mph 144 – 207 mph (21.0/-21.0) – (43.0/-43.0)	Yes ³	Yes	Yes ³
M Miami-Dade ⁴ Doors are available up to 14' tall or a max weight of 635 lbs.	9'	WP8i-WP10i	169 – 185 mph 214 – 240 mph (45.3/-51.2) – (50.0/-62.0)	Yes	No	No
	16'	WP8i	169 mph 218 mph (45.8/-49.3)	Yes	No	No
	18'	WP8i	165 mph 212 mph (42.0/-46.0)	Yes	No	No

¹ Based on ASCE7-05

² Based on ASCE7-10

³ Option available on select models.

⁴ Miami-Dade wood doors require wood-on-steel base construction.




Amarr Horizon H01000 with Dark Bronze finish and Frost glass

AMARR HORIZON H01000

Gain a unique perspective for your home. The Amarr Horizon H01000 combines strong horizontal lines with long, narrow expanses of glass to make a distinctive design statement. These sleek, contemporary, aluminum doors are available with dozens of glazing and color options, so your choices are practically limitless, and the outlook is always bright.

DOOR CONFIGURATIONS

FOR SINGLE PANE GLAZING




FOR INSULATED GLAZING



FOR SINGLE PANE GLAZING		
Door Width	# Center Stiles	# Windows/Section
Up to 8' 2"	0	2
8' 3" – 16' 2"	1	4
16' 3" – 20' 2"	2	6

FOR INSULATED GLAZING		
Door Width	# Center Stiles	# Windows/Section
Up to 10' 2"	1	4
10' 3" – 16' 2"	2	6
16' 3" – 20' 2"	3	8

CONSTRUCTION

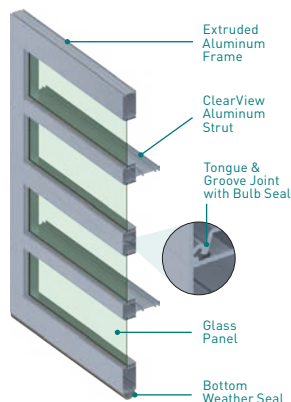

ALUMINUM

An Amarr Horizon H01000 multiview door offers unique styling to match any modern architecture.

- Extruded aluminum frame provides durability, low maintenance and corrosion resistance
- ClearView Aluminum Strut System does not restrict viewing area and adds strength and durability
- 7' tall doors are three sections high
- Equal glass heights in all sections of a door
- Glass expanses up to 8'2" wide

Exterior Handles (2 Included)

WIND LOAD APPROVALS

Exposure B with mean roof height < 30' Doors are available up to 14' tall or a max weight of 635 lbs.	Door Width Up To	WindPro Up To	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
					Standard	Impact
Amarr Horizon H01000 5-Year Limited Warranty	18'	WP2-WP5	134 – 168 mph (14.7/-16.6 – (23.0/-26.0))	No	Yes	No

¹ Based on ASCE7-05

² Based on ASCE7-10

COLORS - HORIZON AND VISTA

IN STOCK

ANODIZE



PAINT



White Powder Coat (WH)

SPECIAL ORDER


ANODIZE



Champagne (AH) Copper (AC) Medium Bronze (AM)

Longer lead time and price upcharge may apply.

GLASS - HORIZON AND VISTA

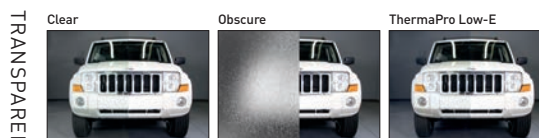

*Laminated, not tempered. Insulated glass not available.



Clear Anodized frame with Obscure glass windows

AMARR VISTA VI1000


It's the perfect reflection of your style. The modern industrial look goes residential with the introduction of the Amarr Vista collection.

From the outside, these sleek doors perfectly mirror the clean lines

and glass expanses of your home's contemporary design.

Inside, they transform your garage into a bright and inviting room.

DOOR CONFIGURATIONS



WIND LOAD APPROVALS

Exposure B with mean roof height < 30'
Doors are available up to 14' tall or a max weight of 635 lbs.

	Door Width Up To	WindPro	Wind Load Approved for Wind Speeds Ranging MPH/MPH ² (PSF Design Pressures)	Impact Resistant	Glass Available	
					Standard	Impact
Amarr Vista VI1000 5-Year Limited Warranty	9'	WP6	140 mph 180 mph (28.0/-33.1)	No	Yes	No
	12'	WP1-WP6	90 - 140mph 116 - 181mph (11.4/-13.1) - (27.6/-31.7)	No	Yes	No
	16'	WP1-WP7	90 - 151mph 116 - 194mph (11.1/-12.6) - (31.2/-35.3)	No	Yes	No

¹ Based on ASCE7-05

² Based on ASCE7-10

SPECIAL ORDER

PAINT PVDF (Kynar®) & Powder Coat



Glass is tempered and available as single pane or insulated.

Longer lead time and price upcharge may apply.

	PVDF (Kynar®)	Powder Coat
FADE RESISTANT	++	+
CORROSION RESISTANT	++	+
UV RESISTANT	++	+
ABRASION RESISTANT	+	++
STANDARD COLORS	26	21
RAL/CUSTOM COLOR PRICE UPCHARGE	\$	\$\$
TOUCH-UP PAINT	Included	NOT included



OPTIONAL PANELS

Aluminum & Insulated Aluminum




Shown in Clear Anodized.

Perforated Aluminum



0.312" square perforations on 1/2" centers

Louvered Aluminum




6 columns of [12] 3"x 3/4" vents on a 4' x 24" panel
Shown in White Powder Coat

CONSTRUCTION

ALUMINUM

- 2" thick extruded commercial-grade aluminum frame for durability
- Corrosion resistant aluminum
- ClearView Strut System strengthens door without restricting view

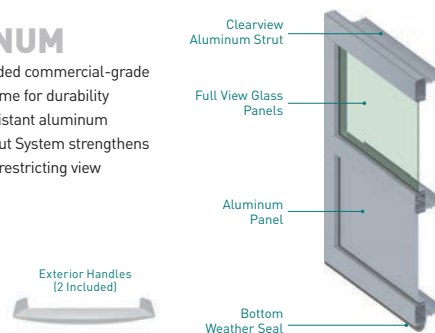

ASCE 7-05 Wind Speed	90 MPH	110 MPH	130 MPH	155 MPH	185 MPH	
ASCE 7-10 Wind Speed (Florida)		142 MPH	168 MPH	200 MPH	239 MPH	DADE
DOOR WIDTH						
UP to 9'	12.8 / -15.1 psf	19.1 / -22.6 psf	26.7 / -31.6 psf	38.0 / -44.9 psf	54.2 / -64.0 psf	45.3 / -51.2 psf
10' to 16'	12.3 / -13.9 psf	18.3 / -20.8 psf	25.6 / -29.1 psf	36.4 / -41.4 psf	51.9 / -58.9 psf	45.8 / -49.3 psf
18'	12.2 / -13.8 psf	18.2 / -20.6 psf	25.4 / -28.7 psf	36.1 / -40.8 psf	51.4 / -58.1 psf	42.0 / -46.0 psf

STEEL SPECIFICATIONS

	CARRIAGE HOUSE DESIGN												TRADITIONAL				
	AMARR CARRIAGE COURT CC4000	AMARR CLASSICA CL1000	AMARR CLASSICA CL2000	AMARR CLASSICA CL3000	AMARR HILLCREST HI1000	AMARR HILLCREST HI2000	AMARR HILLCREST HI3138	AMARR HILLCREST HI3000	AMARR DESIGNER'S CHOICE DC3138	AMARR DESIGNER'S CHOICE DC3200	AMARR HERITAGE HR1000	AMARR HERITAGE HR2000	AMARR HERITAGE HR3000	AMARR LINCOLN LI1000	AMARR LINCOLN LI2000	AMARR LINCOLN LI3138	
PANEL DESIGNS																	
Short											•	•	•	•	•	•	
Long											•	•	•	•	•	•	
Flush				•									•	• ⁵	• ⁵	•	
Ribbed													NA			NA	
Carriage House	18 Designs	7 Designs	7 Designs	7 Designs	3 Designs	3 Designs	3 Designs	3 Designs	1 Design	3 Designs	3 Designs	3 Designs	3 Designs				
CONSTRUCTION LAYERS	4	1	2	3	1	2	3	3	3	3	1	2	3	1	2	3	
Steel		•			•						•			•			
Steel + Insulation			•			•						•			•		
Steel + Insulation + Steel				•			•	•	•	•			•			•	
Overlay + Steel + Insul. + Steel	•																
DOOR THICKNESS	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	1-3/8" (3.5cm)	2" (5.1cm)	1-3/8" (3.5cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	2" (5.1cm)	1-3/8" (3.5cm)	
INSULATION	Polystyrene ¹		Polystyrene ¹	Polyurethane		Polystyrene ¹	Polystyrene ¹	Polystyrene ¹	Polyurethane	Polyurethane		Polystyrene ¹	Polystyrene ¹		Polystyrene ¹	Polystyrene ¹	
R-VALUE²	6.48		6.64	13.35		6.64	6.48	9.05	14.46	19.40 [†] /13.35 ^{**}		6.64	9.05		6.64	6.48	
STEEL THICKNESS																	
Gauge [ga]	27/27 ga	24 ga	24 ga	25/27 ga	25 ga	25 ga	27/27 ga	27/27 ga	27/27 ga	27/27 ga	24 ga	24 ga	24/27 ga	25 ga	25 ga	27/27 ga	
Gauge [mm]	0.42/0.42mm	0.61mm	0.61mm	0.53/0.42mm	0.53mm	0.53mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.42/0.42mm	0.61mm	0.61mm	0.61/0.42mm	0.53mm	0.53mm	0.42/0.42mm	
THERMAL SEAL									•	• [†]			•				
EXTERIOR COLOR OPTIONS																	
True White (TW)	• ³	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Almond (AL)	• ³	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Wicker Tan (WK)	NA	•	•	•	NA	NA	•	•		NA				NA	NA	•	
Sandtone (ST)	• ³	•	•	•	•	•	•	•		•	•	•	•	•	•	•	
Terratone (TT)		•	•	•	NA	NA	•	•						NA	NA	•	
Dark Brown (DN)		•	•	•	•	•	•	•		•	•	•	•	•	•	•	
Charcoal Gray (EF)		•	•	•	NA	NA	NA	NA						NA	NA	NA	
Black (BL)		•	•	•	•	•	•	•		•	•	•	•	•	•	•	
Golden Oak (OK)		•	•	•													
Walnut (NT)		•	•	•	•	•	•	•		•	•	•	•	•	•	•	
Mahogany (MY)		•	•	•	NA	NA	NA	NA		NA	NA	NA	NA	NA	NA	NA	
Weathered Gray (WZ)		•	•	•													
WARRANTY⁴																	
Paint Finish Warranty ⁴	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	15 Years	25 Years	Lifetime
Workmanship/Hardware Wty ⁴	5 Years	3 Years	5 Years	Lifetime	1 Year	2 Years	3 Years	3 Years	5 Years	Lifetime	3 Years	5 Years	Lifetime	1 Year	2 Years	3 Years	

¹ Insulation on Amarr brand doors has passed self-ignition, flamespread, and smoke developed index fire testing.
² Calculated door section R-value is in accordance with DASMA TDS-163.
³ With White Overlay.
⁴ For complete warranty details, visit amarr.com or contact your local Amarr dealer.
⁵ Flush Panel design has Stucco texture.

* True White Bead Board only.
 ** All other panels and colors except True White Bead Board.
[†] True White Short and Flush panel designs only.
[‡] All panels and colors except True White Short and Flush panel designs.
 NA Currently Unavailable.



Amarr Color Zone

Over 800 Sherwin-Williams paint colors – approved color list is at amarr.com/amarr_color_zone. Your local Sherwin-Williams store can provide paint chips of selected color.



Fairfield design with Closed Square in True White/White with Alpine decorative handles



Our Philosophy. Since 1951, we have successfully raised the standards of quality, value, and dependability in the garage door industry. Today, with the same promise of individual attention and great value for all our customers, we remain committed to offering Amarr products and services that raise those standards even higher.

Visit amarr.com for additional products, such as Amarr by Design custom wood carriage house doors, specialty doors, garage flooring, accessories, and a full line of Amarr commercial sectional, rolling slat, and rolling steel doors.

Amarr Company
165 Carriage Court
Winston-Salem, NC 27105
800.503.DOOR
www.amarr.com



Amarr, Classica, and Heritage as words and logos are trademarks belonging to Amarr Company, owned by ASSA ABLÖY.
Door specifications and technical data subject to change without notice.
Sectional door products from Amarr Company may be the subject of one or more U.S. and/or foreign, issued and/or pending, design and/or utility patents.

©ASSA ABLÖY
Printed in USA Form #6680123/PDF